

UNCLASSIFIED

AD NUMBER

AD331651

CLASSIFICATION CHANGES

TO: **unclassified**

FROM: **confidential**

LIMITATION CHANGES

TO:

**Approved for public release, distribution
unlimited**

FROM:

**Distribution authorized to U.S. Gov't.
agencies only; Test and Evaluation; JUN
1962. Other requests shall be referred to
Commanding General, Army Ballistic
Research Lab. ATTN: AMXBR-SS. Aberdeen
Proving Ground, MD 21005.**

AUTHORITY

**USABRL notice, 30 Oct 1975; USARDEC/AMSRD
ltr, 14 Oct 2005**

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER

AD331651

CLASSIFICATION CHANGES

TO

confidential

FROM

secret

AUTHORITY

USABRL notice, 30 Oct 1975

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

D_ 331651-L

CLASSIFICATION CHANGED
TO: UNCLASSIFIED
FROM: CONFIDENTIAL
AUTHORITY:
_____ USABRL notes
_____ 30 OCT 75

UNCLASSIFIED


NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto

SECRET

THIS DOCUMENT CONSISTS OF 30 PAGES
COPY xx OF 100 COPIES, SERIES A

(10)

931634

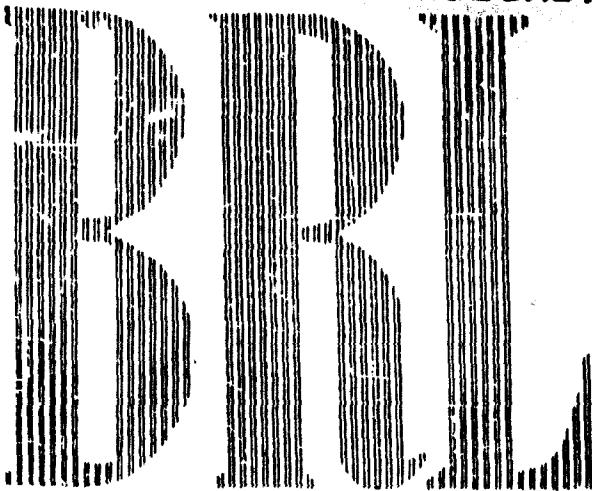

MEMORANDUM REPORT NO. 1409
JUNE 1962

AD 471
ASIN

1651
331

ESTIMATED INCAPACITATION PROBABILITIES OF
CALIBER .14 BULLETS (U)

Chester Grabarek
Anthony Ricchiazzi
Dennis Dunn

Department of the Army Project No. 503-04-010
Ordnance Management Structure Code No. 5010.11.817
BALLISTIC RESEARCH LABORATORIES



ABERDEEN PROVING GROUND, MARYLAND

DOWNGRADED AT 12 YEAR INTERVALS;
NOT AUTOMATICALLY DECLASSIFIED.
DOD DIR 5200.10

SECRET

**Best
Available
Copy**

Retain or destroy per AR 380-5 and AR 345-220, or comparable Navy or AF Regulations. Contractors should consult their government contracting offices regarding procedures to be followed. DO NOT RETURN

ASTIA AVAILABILITY NOTICE

Qualified requestors may obtain copies of this report from ASTIA.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18 U. S. C. Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

The findings in this report are not to be construed as an official Department of the Army position.

SECRET

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. D-09

JUNE 1962

ESTIMATED INCAPACITATION PROBABILITIES OF
CALIBER .14 BULLET (U)

Chester Grubarek
Anthony Ricchiazzi
Dennis Dunn

Terminal Ballistics Laboratory

Department of the Army Project No. 503-04-010
Ordnance Management Structure Code No. 5010.11.817

ABERDEEN PROVING GROUND, MARYLAND

SECRET

SECRET

BALISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 1409

Wukrek /AJRicchiazzi/DDunn/ic
Aberdeen Proving Ground, Md.
June 1962

ESTIMATED INCAPACITATION PROBABILITIES OF
CALIBER .14 BULLETS (U)

(UNCLASSIFIED)

ABSTRACT

Caliber .14 spin-stabilized projectiles were fired into gelatin and measurements of the loss in velocity of the projectiles were obtained. The yaw angle at impact and the striking velocity were varied; ^{the} were related to the energy absorbed by the gelatin. The probability of incapacitation as a function of range was computed. The effect of two different nose shapes on the probability of incapacitation was studied.

SECRET

(UNCLASSIFIED) TABLE OF CONTENTS

	Page
LIST OF SYMBOLS.	6
INTRODUCTION.	7
PROCEDURE FOR ESTIMATING THE VALUE OF P_{hk}	8
EXPERIMENTAL CONDITIONS	9
Caliber .14 Barrel And Cartridge C	9
Caliber .14 Projectiles.	9
Range Setup	9
MEAN DRAG COEFFICIENT IN GELATIN.	10
RESULTS FOR THE 7.5 CALIBER OGIVE BULLET.	12
Energy Loss As A Function Of Striking Velocity And Yaw Angle At Impact	12
Yaw As A Function Of Range.	13
The Velocity-Range Relation	13
Probability Of Incapacitating Personnel	13
EFFECT OF NOSE SHAPE ON P_{hk}	15
REFERENCES.	17
DISTRIBUTION LIST	29

(UNCLASSIFIED)

LIST OF SYMBOLS

- ϵ = energy loss of bullet in traversing the first 6" of gelatin.
 ΔV = velocity loss of bullet in traversing the first 6" of gelatin.
 δ = angle of yaw.
 δ_i = angle of yaw at impact.
 v = velocity of bullet.
 v_s = striking velocity of bullet.
 R = range.
 ρ = density of gelatin.
 d = diameter of bullet.
 K_{Dg} = drag coefficient, based on d^2 , in gelatin.
 \bar{K}_{Dg} = mean value of K_{Dg} averaged over 6" of travel in gelatin.
 K_{Da} = drag coefficient, based on d^2 , in air.
 m = mass of bullet.
 x = distance penetrated in gelatin.
 P_{hk} = probability that a hit incapacitates.

CONFIDENTIAL

(CONFIDENTIAL)

INTRODUCTION

Recent advances in barrel fabrication at the Springfield Armory have made feasible the production of a few test rifle barrels of 0.14-inch bore. Theoretically, the anti-personnel effectiveness of a small bullet is attractive¹. Consequently, the Springfield Armory requested BRL to investigate the capabilities of caliber .14 bullets against personnel targets. A preliminary investigation was made using gelatin targets. The results are given in this report.

CONFIDENTIAL

SECRET

(SECRET)

PROCEDURE FOR ESTIMATING THE VALUE OF P_{hk}

The anti-personnel effectiveness of a bullet depends on its kill probability at various ranges. The kill probability is the product of its hit probability, which is determined by its accuracy, and the probability that a hit incapacitates. In this report we are not considering accuracy. We are concerned with the conditional probability that a hit incapacitates, P_{hk} .

In a first approximation, the value of P_{hk} for a bullet is related to its energy loss in penetrating gelatin. This relation, given by Sperrazza and D'Addario¹, states that the only region of interest is the region between 1 to 15 cm in gelatin. For our bullets, which tumble after entering gelatin, the energy loss over the first centimeter, where the yaw is small, is negligible. Consequently, we have assumed that the energy loss over the first six inches is equal to the energy loss between 1 to 15 cm.

Kent has proposed theoretically² that the yaw angle at impact plays a major role in determining the rapidity of tumbling in a dense media. To test this proposal, some preliminary tests were made. Bullets of 0.14-inch diameter were shot into gelatin. The yaw angle at impact was measured and the damage in the gelatin perpendicular to the path was observed. The results, shown on Figures 1 and 2, show the great importance of the initial yaw angle, δ_g . We conclude that the yaw angle at impact affects the energy loss in gelatin.

In order to obtain the relationship between energy loss and range, $\Delta E(R)$, four intermediate relationships are needed. These are:

1. The energy loss of the bullet over the first 6" of gelatin as a fraction of the striking velocity, $\Delta E(V_s)$.
 2. The energy loss in gelatin as a function of the yaw angle at impact, $\Delta E(\delta_g)$.
 3. The yaw angle at impact as a function of range, $\delta_g(R)$.
 4. The bullet striking velocity as a function of range, $V_s(R)$.
- The dependence of energy loss on striking velocity and impact yaw angle, $\Delta E(V_s, \delta_g)$, was determined experimentally. The third relationship was computed from data for larger projectiles. The loss in bullet velocity with range was obtained by combining experimental data from three sources.

SECRET

CONFIDENTIAL

(CONFIDENTIAL) EXPERIMENTAL CONDITIONS

Caliber .45 Barrel and Cartridge Case

A special barrel, 18" long, with a twist of 1 turn in 4.2" was supplied by Springfield. The barrel was designed to launch a 17-grain bullet at a muzzle velocity of 4400 ft/sec. The cartridge case was a modified Remington Caliber .307 case, Figure 3.

Caliber .45 Projectiles

The caliber .45 projectiles, Figure 4, were fabricated from 1020 mild steel. Core weight was about 14.5 grains. Copper plating, about .004 inches thick, on the steel core increased the projectile weight to about 17 grains.

For comparison of results, two 7.62mm NATO bullets were used. These were the 147-grain M80 (lead core) and the M99 (steel core) bullets.

Range Setup

At short ranges, multiple spark shadowgraph photography was used to obtain photographs of the projectiles in free flight before and after impacting a 5 x 6 x 6 inch gelatin block, Figure 5. From the orthogonal sprague shadowgraphs immediately before impact, the angle of yaw at impact was obtained. The residual velocity of the projectile was determined from the measured time interval and the measured flight coordinates of the bullet in space immediately behind the gelatin. Projectile velocities were computed from the measured times of flight over the 5' and 10' base lines, Figure 5, and were corrected for air drag to obtain striking velocities.

At ranges of 100 meters or more, three lumiline screens were used to obtain the velocity before impact. The striking velocity was determined by applying the drag correction. Behind the gelatin, three large foil screens were used to obtain the path coordinates, bullet velocity and the velocity loss per foot of air travel in the yawed orientation. The experimental value of loss in velocity per foot of travel was then used to determine the residual velocity.

CONFIDENTIAL

CONFIDENTIAL

(CONFIDENTIAL) MEAN DRAG COEFFICIENT IN GELATIN

The drag coefficient, K_{Dg} , is defined by the equation

$$\text{drag force} = m V \frac{dV}{dx} = - K_{Dg} \rho d^2 V^2$$

where m , V and d are the mass, velocity and diameter, respectively, of the bullet; ρ is the density of gelatin; and x is the distance penetrated.

Integrating the above equation we obtain

$$V(x) = V_0 \exp \left(- \frac{\rho d^2}{m} \int_0^x K_{Dg} dx \right) \quad (1)$$

where X is the thickness of the gelatin and equals six inches.

For a given shape of projectile, the value of K_{Dg} depends on the angle of yaw and on the velocity and Reynolds number during penetration. Because our bullets tumble, the value of K_{Dg} will vary widely during penetration.

The mean value is defined by the equation

$$\bar{K}_{Dg} = \frac{1}{X} \int_0^X K_{Dg} dx$$

Inserting this definition in equation (1), we obtain

$$V(x) = V_0 \exp \left(- \frac{\rho d^2}{m} \bar{K}_{Dg} X \right). \quad (1A)$$

The velocity and energy losses are

$$\Delta V = V_0 \left[1 - \exp \left(- \frac{\rho d^2}{m} \bar{K}_{Dg} X \right) \right] \quad (2)$$

and $\Delta E = \frac{1}{2} m V_0^2 \left[1 - \exp \left(- \frac{\rho d^2}{m} \bar{K}_{Dg} X \right) \right]$ (3).

All quantities, except \bar{K}_{Dg} , in equation (1A) were experimentally determined. Solving (1A) for \bar{K}_{Dg} by inserting experimental values of the remaining parameters, the value of \bar{K}_{Dg} is determined. The value of \bar{K}_{Dg} will depend on the impact angle of yaw, the relation between yaw angle and distance penetrated, the velocity and Reynolds number. However, two conditions which simplify the dependence of \bar{K}_{Dg} are appropriate to the

CONFIDENTIAL

CONFIDENTIAL

work of this report. In the first place, the effects of tumbling on \bar{K}_{Dg} are expected to override the effects of velocity and Reynolds number. In the second place, the relation between yaw angle and distance penetrated depends theoretically¹ on the static bullet characteristics and the yaw angle at impact, but is independent of striking velocity. Experimental support of the latter simplification is given under RESULTS. Hence, in a first approximation, \bar{K}_{Dg} for a given bullet over six inches of gelatin is assumed to depend only on the yaw angle at impact.

CONFIDENTIAL

SECRET

(SECRET) RESULTS FOR THE 7.5 CALIBER OGIVE BULLET

Energy Loss as a Function of Striking Velocity and Yaw Angle at Impact

A number of firings into six inches of gelatin were made with the 7.5 caliber tangent ogive projectile in order to measure the effect of the impact yaw angle δ_y , on the velocity lost, ΔV , by the projectile through the six-inch gelatin block. For these tests the striking velocity, V_s , was held at about 3930 ft/sec. A plot of ΔV as a function of δ_y is given by the upper curve of Figure 6. For V_s of about 3930 ft/sec., Figure 6 shows that the initial impact angle had a significant effect on ΔV when $\delta_y < 2^\circ$; but at $2^\circ < \delta_y < 5^\circ$ there was little change in ΔV .

Using the observed residual velocities at $V_s = 3930$ ft/sec., the mean drag coefficient was computed by means of equation (1A) for the tumbling bullet over its six-inch path in gelatin. The mean drag coefficient, \bar{K}_{Dg} , is shown on Figure 7. In Reference 1, Kent shows theoretically that the relation between yaw angle and distance penetrated is, in a first approximation, independent of the striking velocity. One infers that the curve of \bar{K}_{Dg} , Figure 7, holds for striking velocities other than 3930 ft/sec. To test this inference, measurements of ΔV were made at a striking velocity of 2080 ft/sec; a curve predicting values of ΔV based on Figure 7 was also computed. The agreement between the predicted curve and observed values of ΔV is shown by the lower curve of Figure 6. We conclude that the curve of \bar{K}_{Dg} , Figure 7, provides the basis from which one can compute, by means of Equations (2) and (3), the dependence of ΔV and ΔE on striking velocity and impact yaw angle for this bullet. The computed energy loss at two striking velocities is illustrated on Figure 8.

To extend the curve of Figure 7 down to $\delta_y = 0$, firings were conducted at a real range of 200 meters. The measured striking and residual velocities of the bullet over 6 inches of gelatin are given below for the average of 10 rounds.

Muzzle Velocity, ft/sec	4500
Striking Velocity, ft/sec	3930
Residual Velocity, ft/sec	2950
ΔV , ft/sec	300
ΔE , joules	93
\bar{K}_{Dg}	.052

SECRET

SECRET

Yaw as a Function of Range

Measurements of the yaw angle in air near the muzzle resulted in an average value of 5° . This average yaw was used as the initial condition in the subsequent yaw-range computation.

The amplitude of the yaw angle decreases with range. For some large projectiles, the damping coefficient is known. For the Caliber .14 bullet, Mr. Maynard Piddington of the Exterior Ballistics Laboratory, BRL, estimated the yaw angle-range function based upon data for larger projectiles. The estimated function is shown on Figure 9. It is estimated that it damps to nearly zero degrees at 120 meters.

The Velocity-Range Relation

Partial information from three sources was used to obtain the bullet velocity as a function of range. One source, Reference 3, gave a curve of drag coefficient in air for a projectile model of approximately the same shape cut to Mach 2.6. A second source was recent data obtained at Frankford Arsenal for the caliber .14 bullet. The Frankford data indicates a velocity of 2330 ft/sec at 1300 ft. for a muzzle velocity of 4410 ft/sec. The third source was an experimental value of drag coefficient obtained near the muzzle by the authors; this value was $K_{D_a} = .125$ at Mach 3.83. A drag coefficient curve was constructed which was compatible with the experimental data and close to the curve of Reference 3. It is given on Figure 10.

Probability of Incapacitating Personnel

The incapacitation capability for a penetrating missile is expressed in BRL TN 1297 in terms of the conditional probability, P_{hk} , that a random hit on the human target will incapacitate within a certain time, under a particular condition of military stress. Partial incapacitations are included. For the analysis of this report, the 1/2-minute assault situation was considered.

The curve of estimated P_{hk} as a function of range, out to 400 meters, is given in Figure 11. For the caliber .14 bullet at 100 meters, $P_{hk} = .64$ and, at 400 meters, $P_{hk} = .40$. For comparison Figure 11 also shows curves

SECRET

SECRET

for the M80 (lead core) and M59 (steel core) 147-grain 7.62mm NATO bullets which are over 3 times heavier than the caliber .14 bullet. Since the M80 deformed on impact, its results do not provide a fair comparison with the caliber .14 bullet. Comparing the M59 results with the caliber .14 results, Figure 11, we see that the 7.62mm projectile at 100 meters results in an estimated value of P_{hk} only 7 percent higher than P_{hk} for the caliber .14 bullet; at 400 meters the 7.62mm bullet's value of P_{hk} is 30 percent higher. Figure 11 indicates that at short ranges, less than 70 meters, the value of P_{hk} for the caliber .14 bullet is greater than .75. Hence, a caliber .14 weapon may be particularly suited to guerrilla and anti-guerrilla warfare or as a patrol weapon. Other considerations, not covered in this report, such as accuracy, weapon weight, ammunition weight, etc., are required in order to assess the military value of a caliber .14 weapon.

SECRET

SECRET

(SECRET) EFFECT OF NOSE SHAPE ON P_{hk}

A hemispherical nose projectile, Figure 4, was fired into gelatin for comparison with the 7.5-caliber ogive projectile. Design characteristics compare as follows:

Nose Shape	Center of Gravity From Base, C.G.	Moment of Inertia, Gr-in ²	
		Axial	Transverse
Hemisphere	.90	.039	.399
7.5-Cal. Tangent Ogive	.93	.036	.445

At an average striking velocity of 3930 ft/sec. the hemispherical nosed projectile went through the gelatin block without tumbling. Experimental results for $\delta_s = 1^\circ$ are given below.

Nose Shape	ΔV Ft/Sec.	ΔV Joules	Estimated Value of P_{hk}
Hemisphere	870	196	.70
7.5-Cal. Tangent Ogive	1870	559	.81

Because the hemispherical nose projectile is stable in gelatin, its drag coefficient in gelatin, \bar{K}_{Dg} , is independent of δ_s for all pertinent values of δ_s . From the above firing data for this projectile the value of \bar{K}_{Dg} is found to be .14. By means of Equation (3) we can compute the function $\Delta E(V_s)$ for the hemispherical nose projectile and can compare it to the 7.5-caliber tangent ogive projectile at equal ranges. The comparison for equal muzzle velocity is presented.

SECRET

SECRET

(SECRET) COMPARISON OF HEMISPHERICAL WITH OGIVAL NOSE SHAPE (U)

RANGE, METERS	BULLET TYPE			
	HEMISPERICAL		7.5-CAL. TANGENT OGIVE	
	V_s , ft/sec	P_{hk} (1/2 min. assault)	V_s , ft/sec	P_{hk} (1/2 min. assault)
0	4400	.72	4400	.86
100	3000	.63	3770	.61
200	2040	.49	2730	.50
300	1400	.36	2710	.45
400	840	.24	2370	.40

At very short ranges the value of P_{hk} for the ogival projectile is higher because its value of δ_g is high and it tumbles rapidly. At ranges of 100 to 200 meters the value of P_{hk} for each bullet type is about the same. The higher striking velocity of the ogival projectile compensates for its slow tumbling. At ranges greater than 200 meters the value of P_{hk} for the ogive nose bullet is higher because of its appreciably higher striking velocity. We conclude that the 7.5-caliber ogive bullet is more lethal than the hemispherical nose bullet.

The last table emphasizes the importance of striking velocity as a contributor to the value of P_{hk} . It suggests that a long ogive projectile may be more lethal than the 7.5-caliber ogive projectile. Preliminary estimates support this suggestion. Thus at 300 meters, an 11-caliber ogive projectile would have a striking energy about 18 percent greater than a 7.5-caliber ogive projectile; values of δ_g would be nearly equal; and the transverse moment of the longer nosed projectile would be only 5 percent higher. Hence we recommend that the lethality of a long nosed, caliber .14 projectile be investigated.

Chester Grabarek *Anthony Ricchiazzi*
CHESTER GRABAREK ANTHONY RICCHIAZZI

W J Dunn
DENNIS DUNN

SECRET


(UNCLASSIFIED)

REFERENCE:

1. Kent, R. H. The Theory of the Motion of a Bullet About its Center of Gravity in Dense Media with Applications to Bullet Design, BRL Report X-65, January 1930.
2. Sperrazza, J. and Dziemian, A. Provisional Estimates of the Wounding Potential of Fiechettes, BRL Technical Note No. 1297, Feb. 1960.
3. Murphy, C. H. and Schmidt, L. E. The Effect of Length on the Aerodynamic Characteristics of Bodies of Revolution in Supersonic Flight, BRL Report No. 876, Aug. 19⁶

CONFIDENTIAL


FIGURE I -- GELATIN RADIAL DAMAGE FOR A CALIBER .14, 7.5 CAL.
TANGENT OGIVE PROJECTILE $V_s = 3930 \text{ FT./SEC. (U)}$

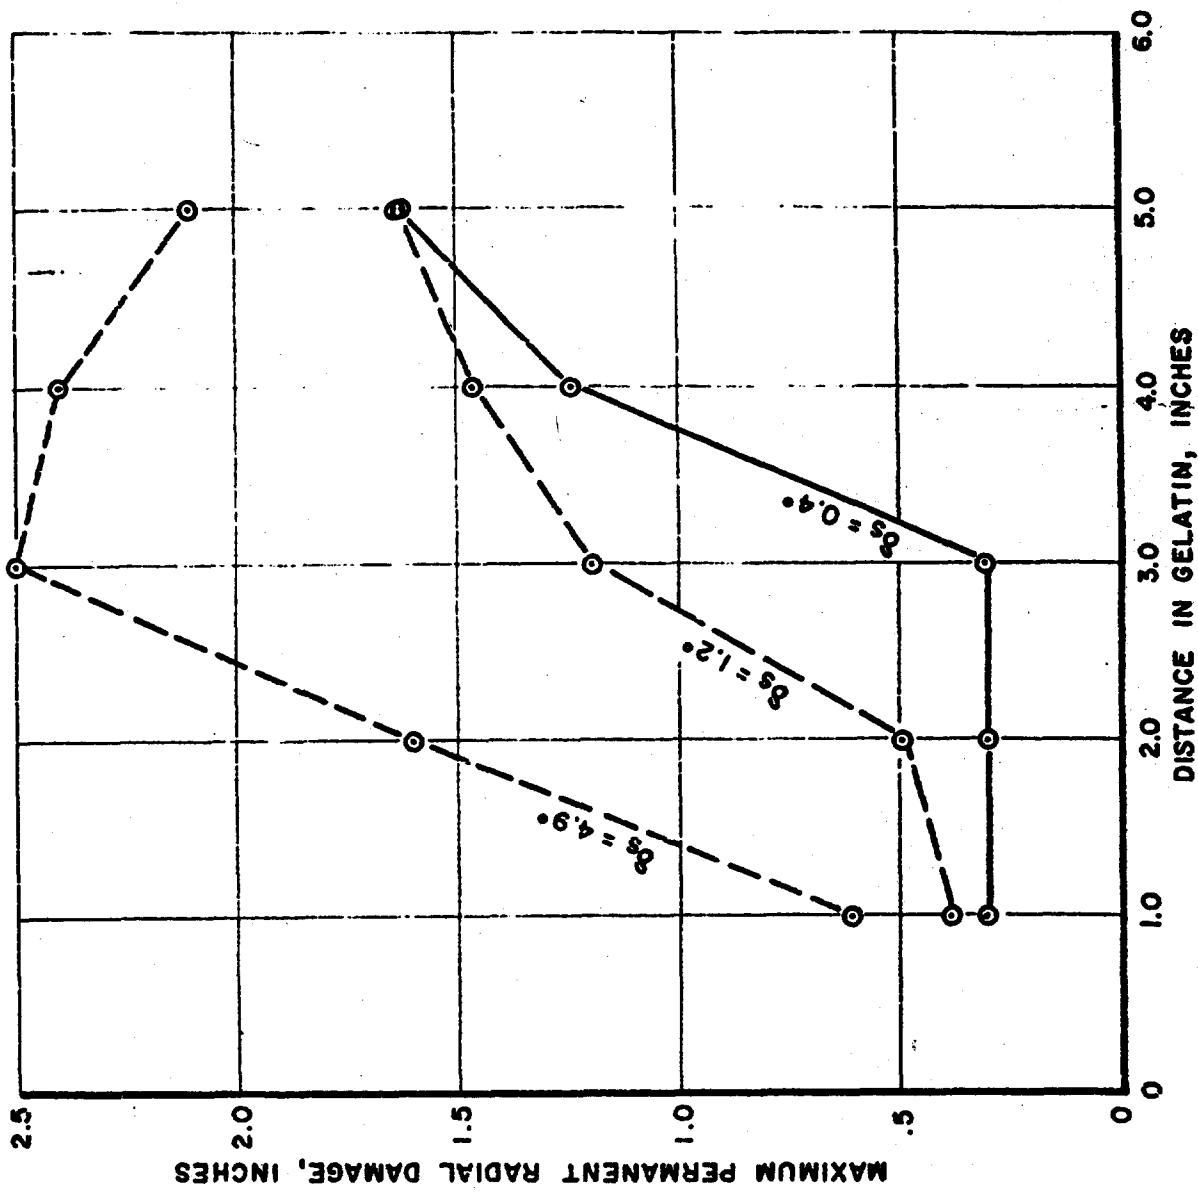

CONFIDENTIAL


~~CONFIDENTIAL~~

(CONFIDENTIAL) FIGURE 2- GELATIN RADIAL DAMAGE FOR A CALIBER .14, 7.5 CAL TANGENT OGIVE PROJECTILE $V_s = 2680 \text{ FT/SEC. (J)}$

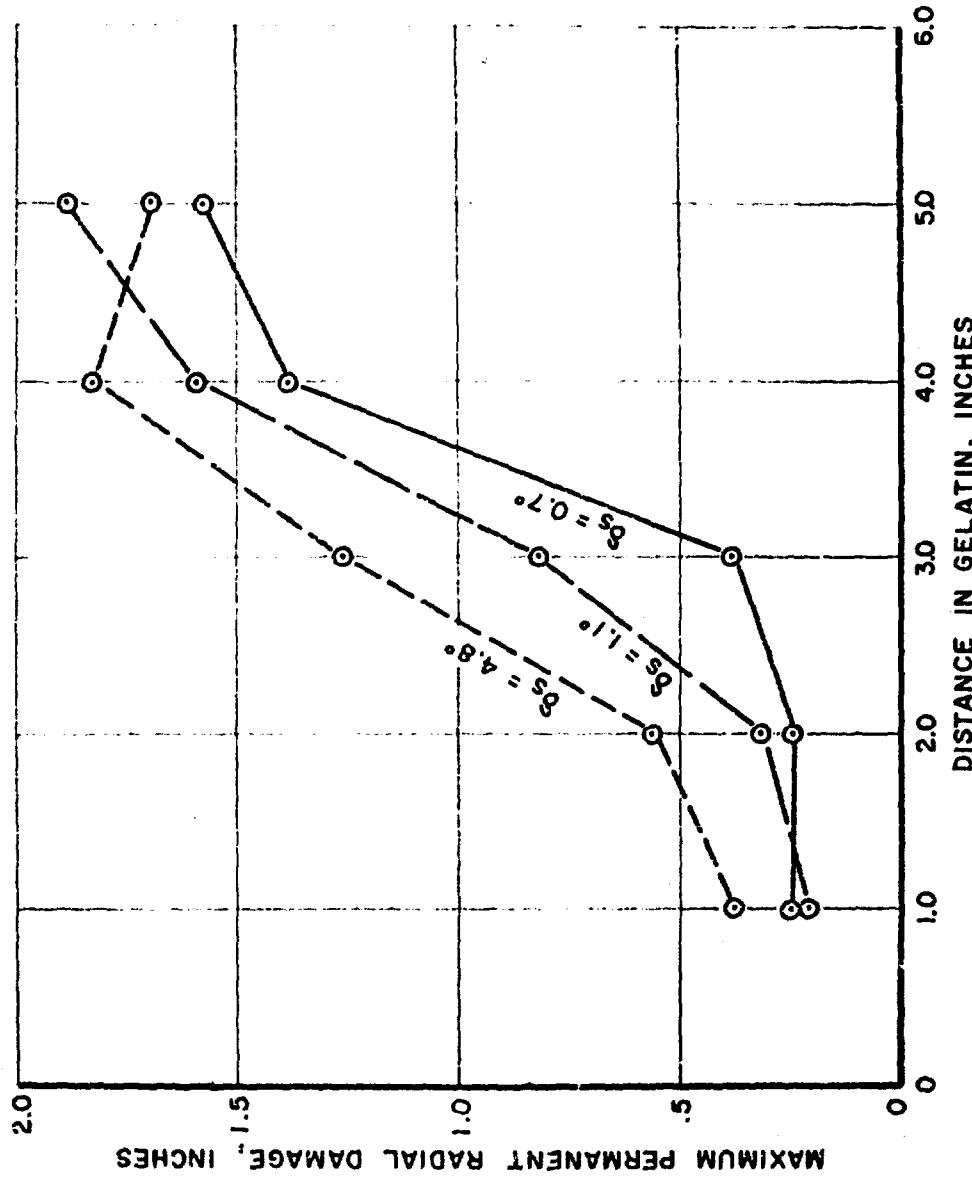

~~CONFIDENTIAL~~



CONFIDENTIAL

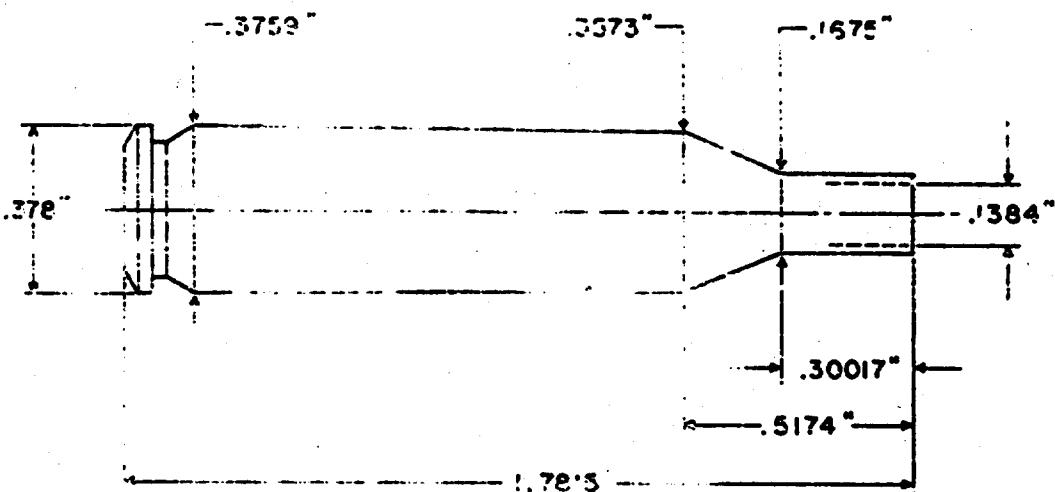

(CONF) FIG. 3 - CARTRIDGE CASE, CALIBER .40 (MODIFIED REMINGTON .222) (U)

CONFIDENTIAL

CONFIDENTIAL

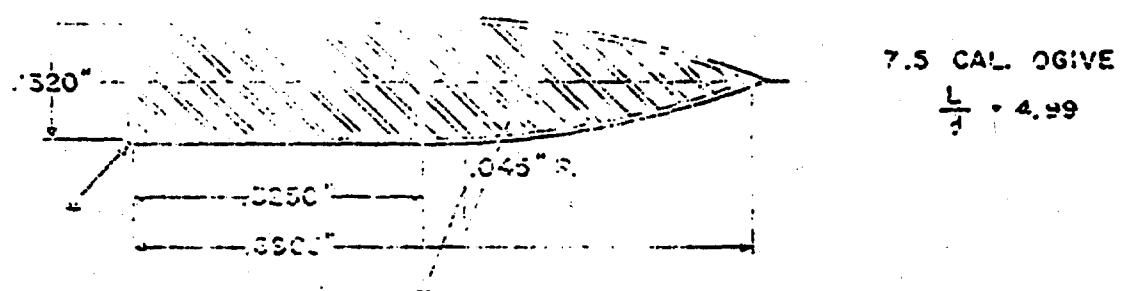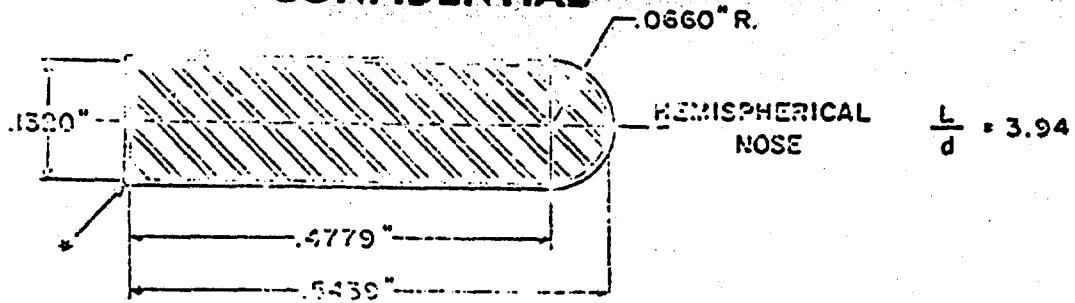


PROJECTILES COPPER PLATED
.004" THICK.

(CONFIDENTIAL) FIG. 4 - CALIBER .14 PROJECTILE,
STEEL CORE, SAE 1020 STEEL 'V'

CONFIDENTIAL

CONFIDENTIAL

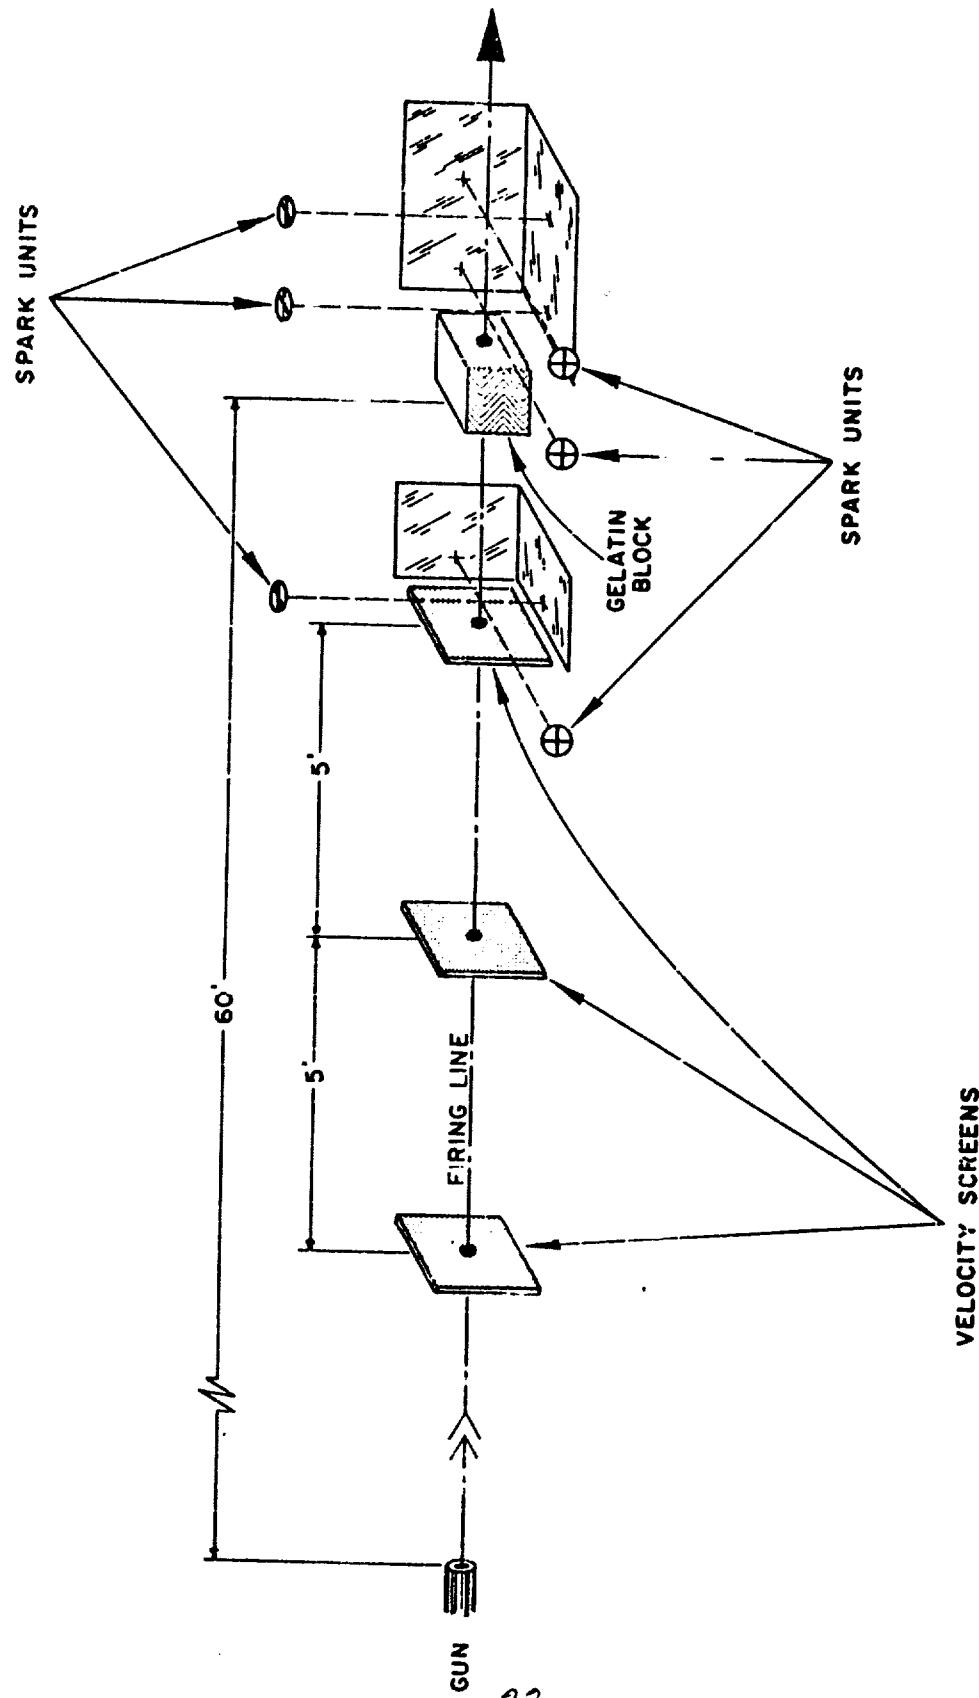


(UNCLASSIFIED) FIG. 5 - RANGE SET-UP (U)

CONFIDENTIAL

SECRET


FIGURE 6.
(SECRET) VELOCITY LOSS FOR CALIBER .14, 7.5 CAL TANGENT OGIVE PROJECTILE
THROUGH SIX INCHES OF GELATIN (1)

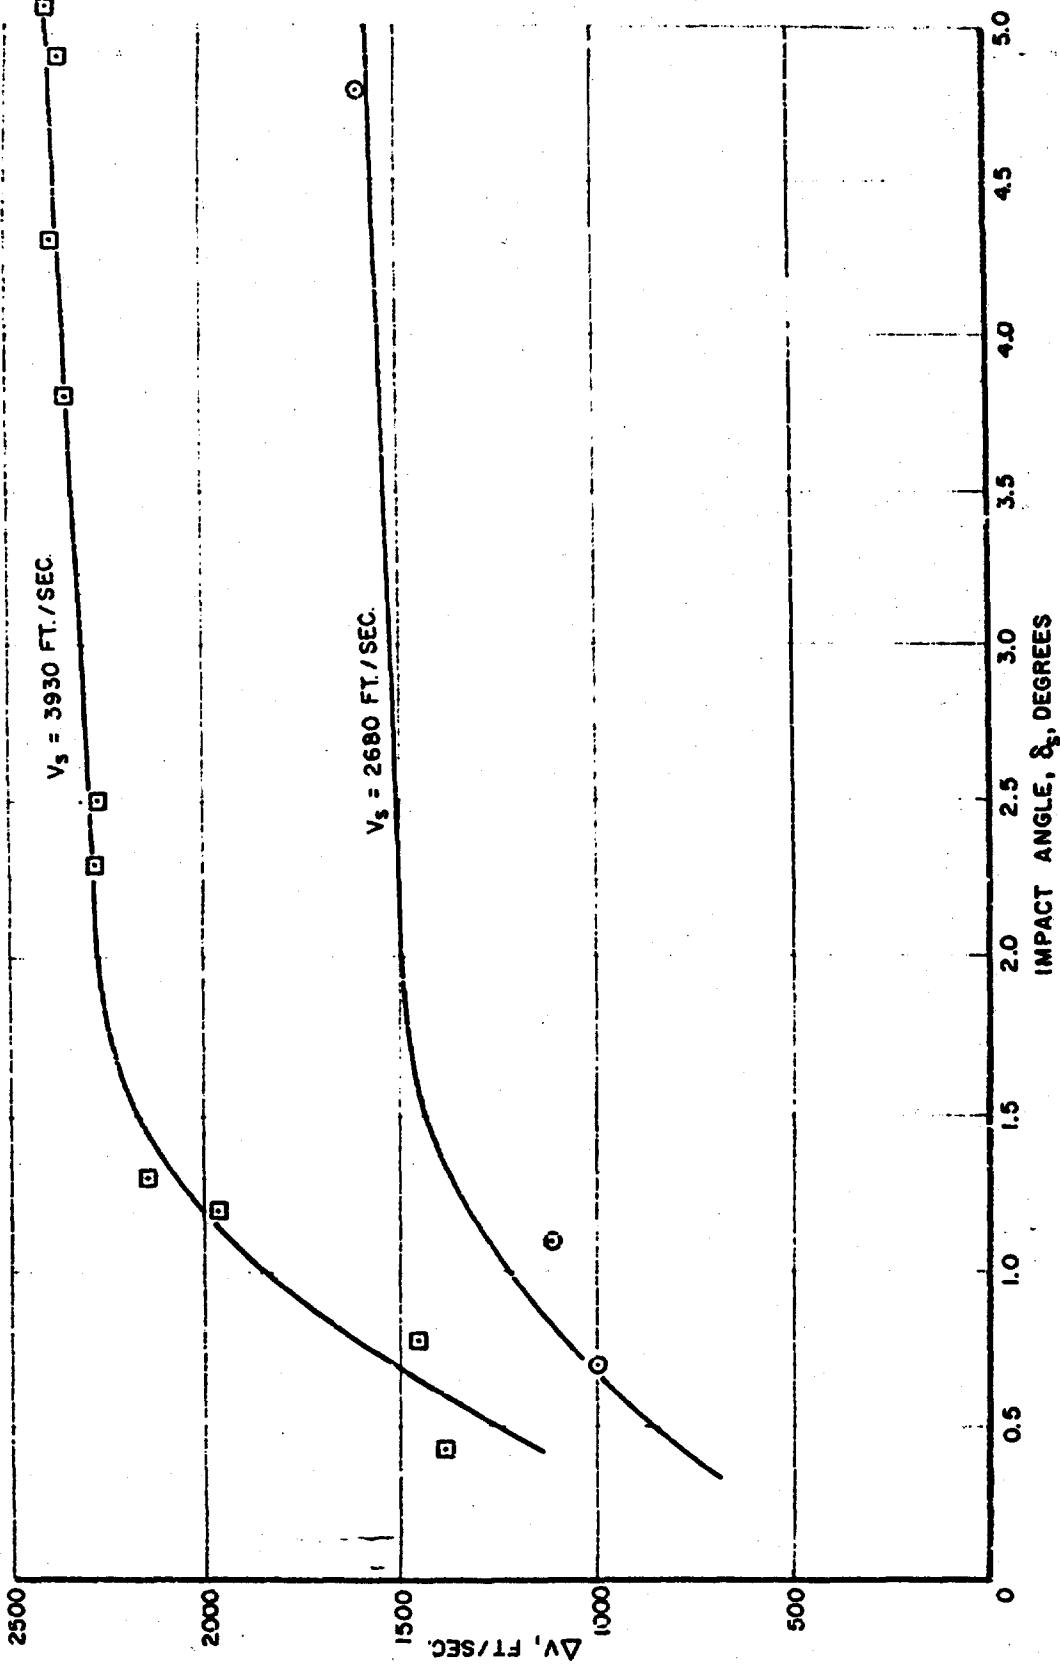

SECRET

~~SECRET~~


(SECRET) FIGURE 7.
CALIBER .14 (7.5 CAL. TANGENT OGIVE) PROJECTILE (v)
 \bar{K}_{Dg} OVER SIX INCHES OF GELATIN

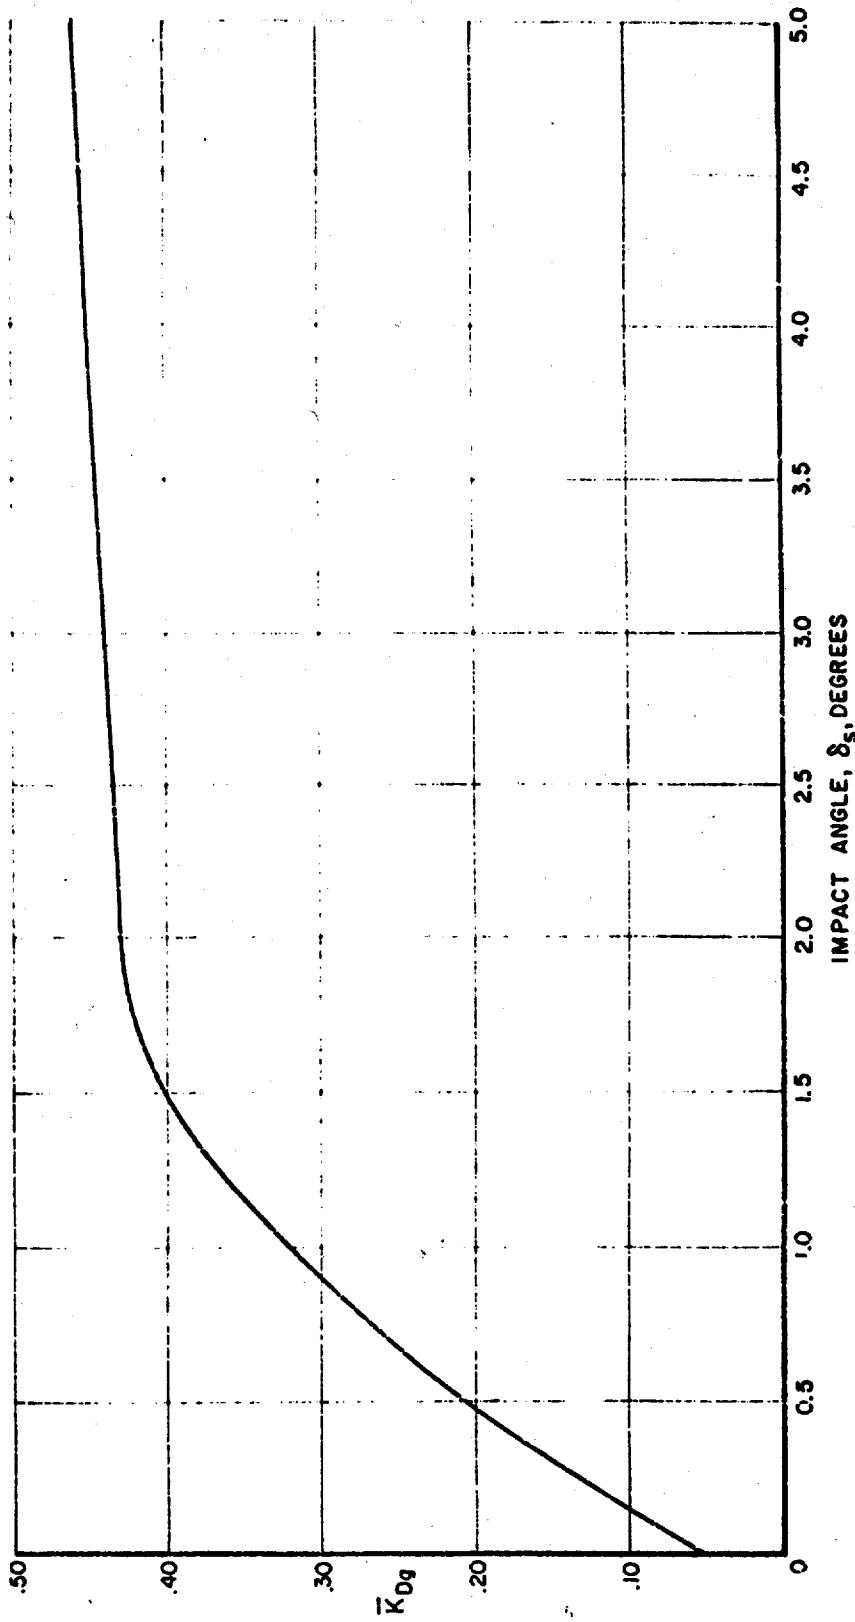

SECRET

SECRET


FIGURE 8.
(SECRET) KINETIC ENERGY LOSS FOR CALIBER .14 (7.5 CAL. TANGENT OGIVE)
PROJECTILE THROUGH SIX INCHES OF GELATIN (•)

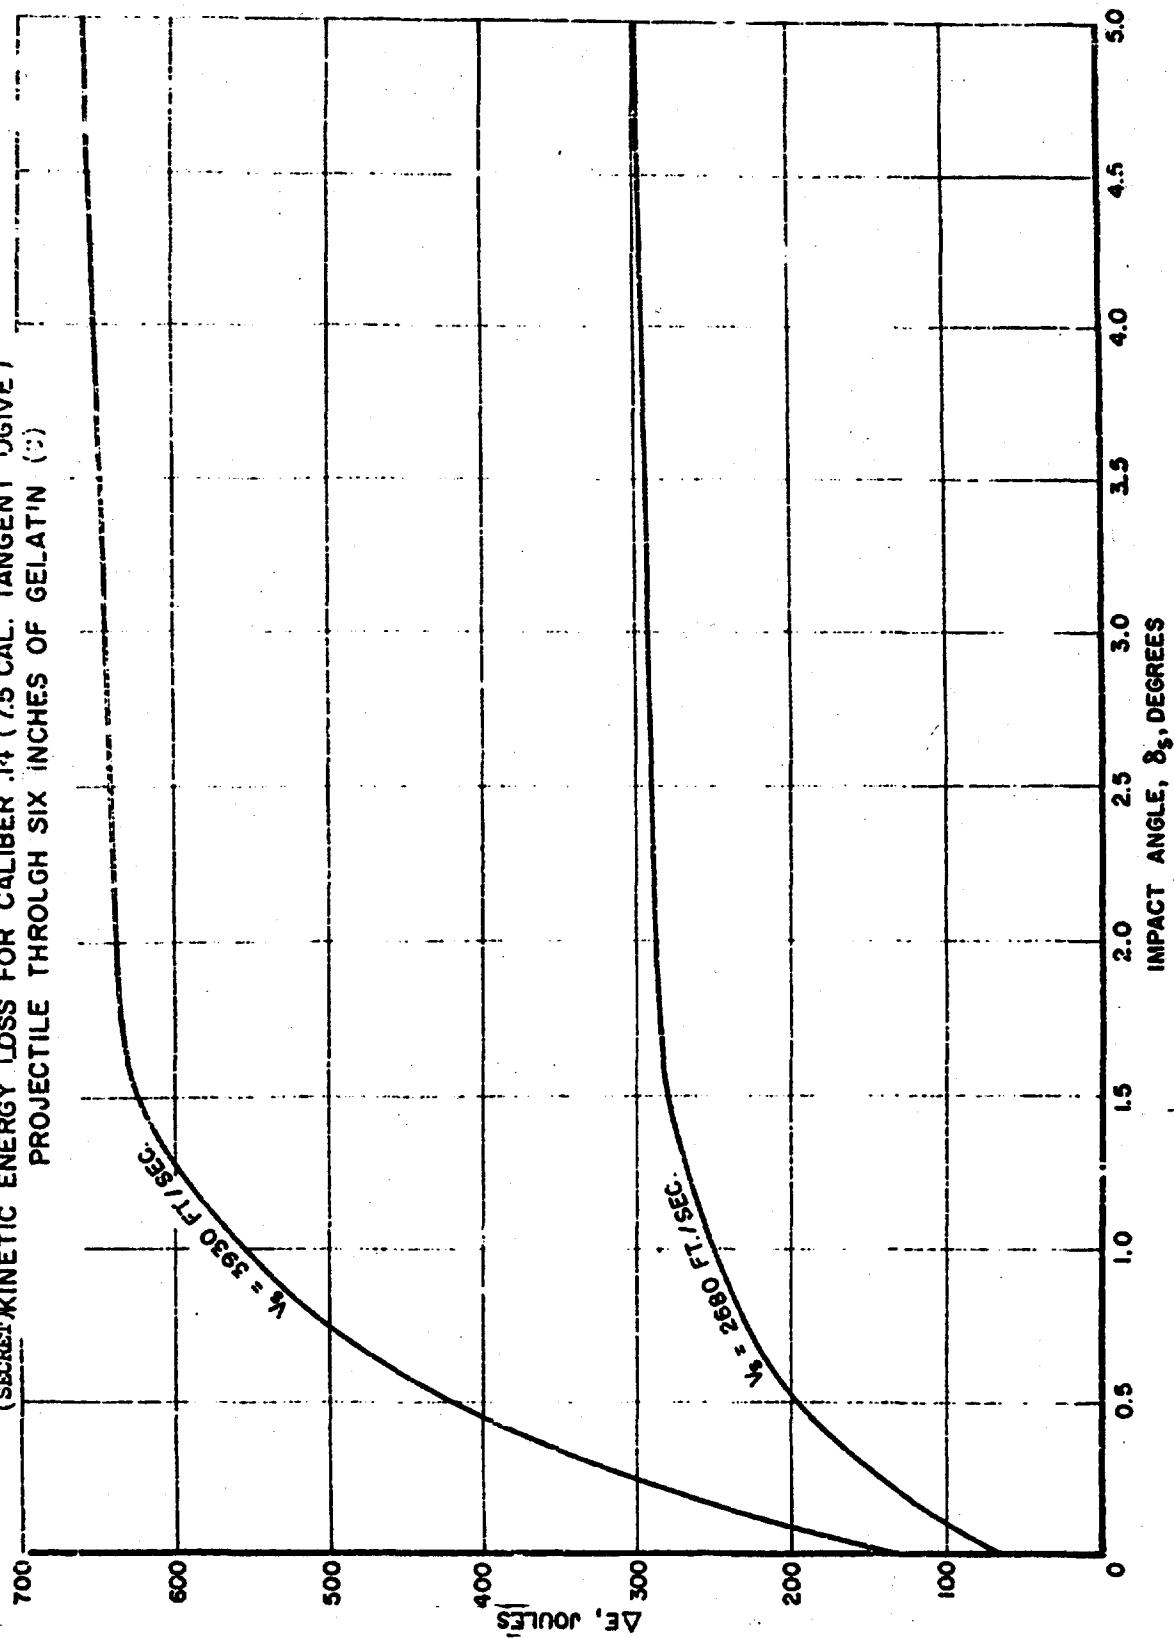

SECRET

~~SECRET~~


(SECRET) FIGURE 9 - YAW ANGLE VERSUS RANGE
CALIBER .14 (.75 CAL TANGENT (GIVE) PROJECTILE (U))

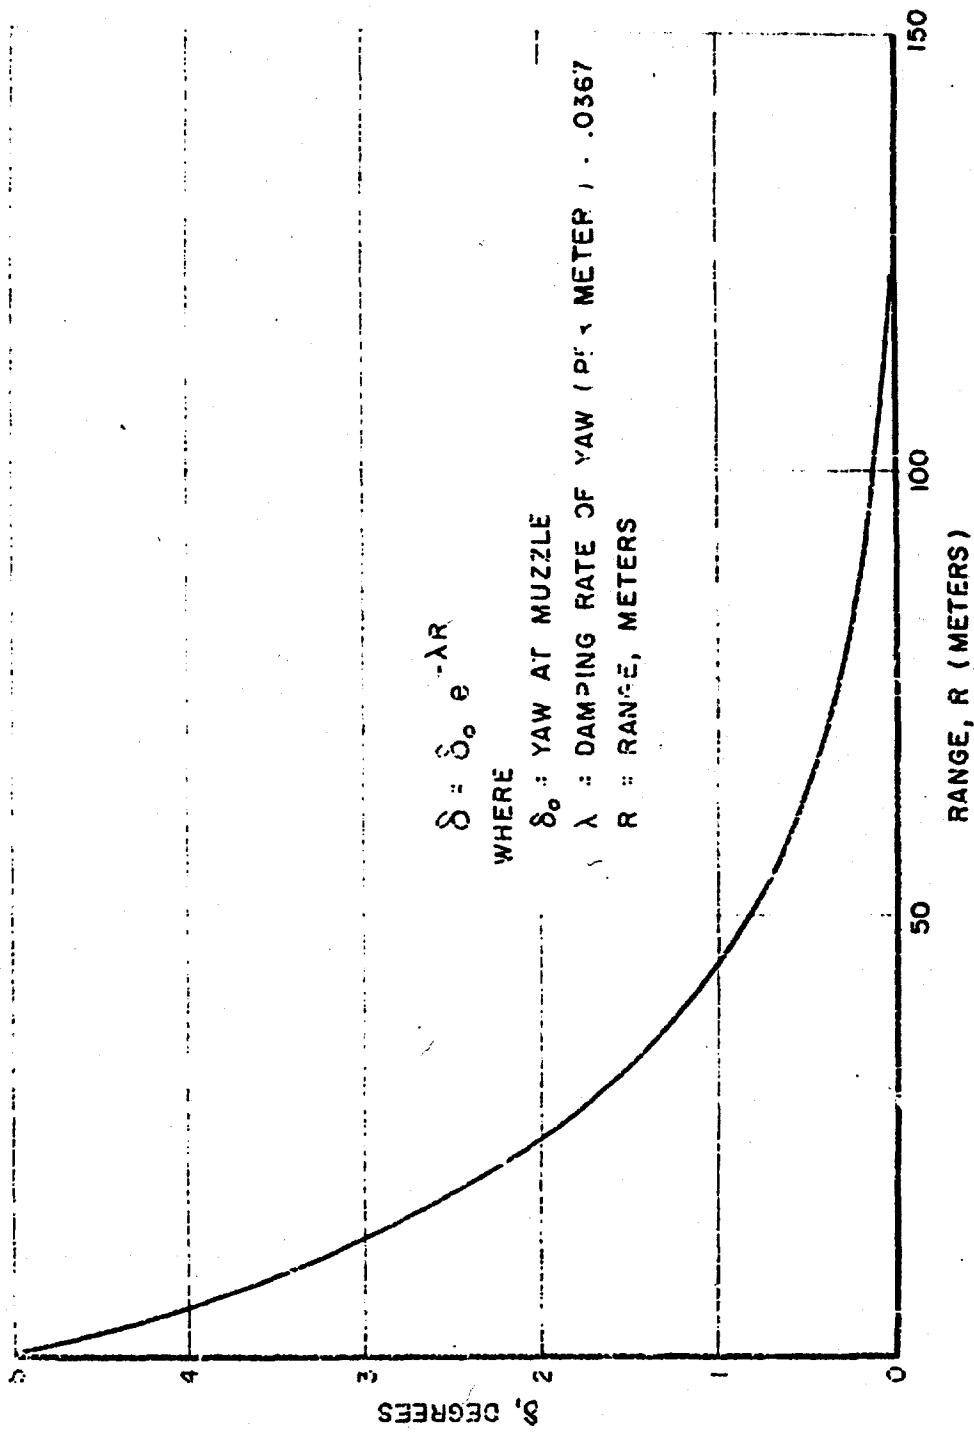

~~SECRET~~

SECRET


(SECRET) FIGURE 10 - DRAG COEFFICIENT IN AIR
CALIBER .14 (7.6 CAL. TANGENT OGIVE) PROJECTILE (U)

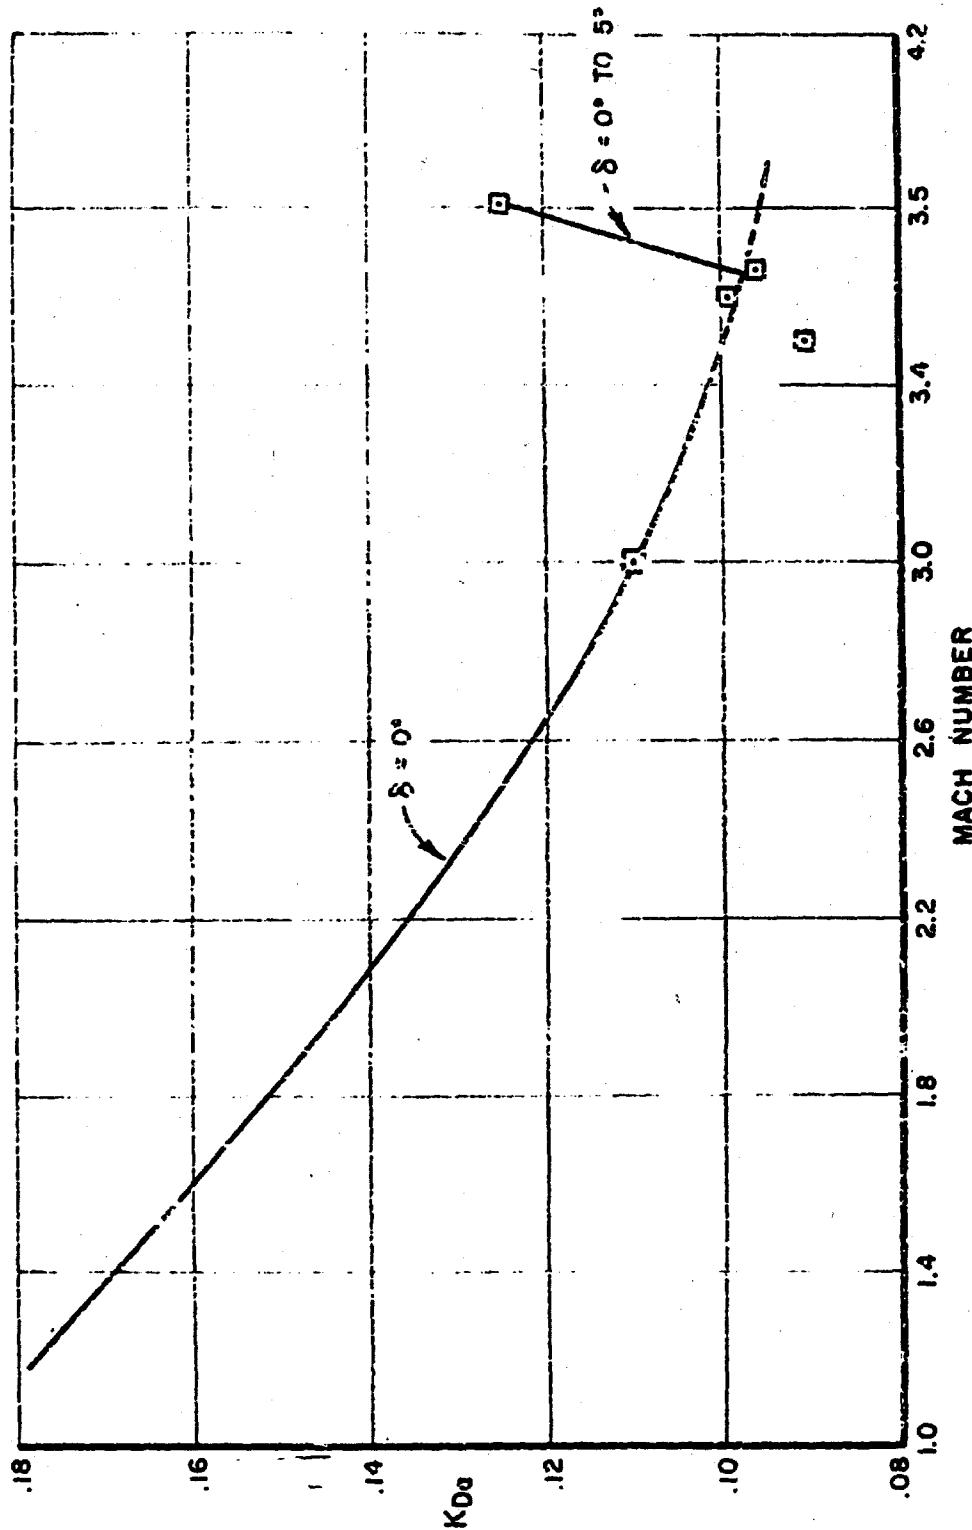

27
SECRET

SECRET

FIGURE 11
(SECRET) P_{hk} (1/2 MINUTE ASSAULT) CALIBER .14 (7.5 CAL OGIVE) BULLET
AND 7.62 MM NATO BALL M80 AND M59. (U)

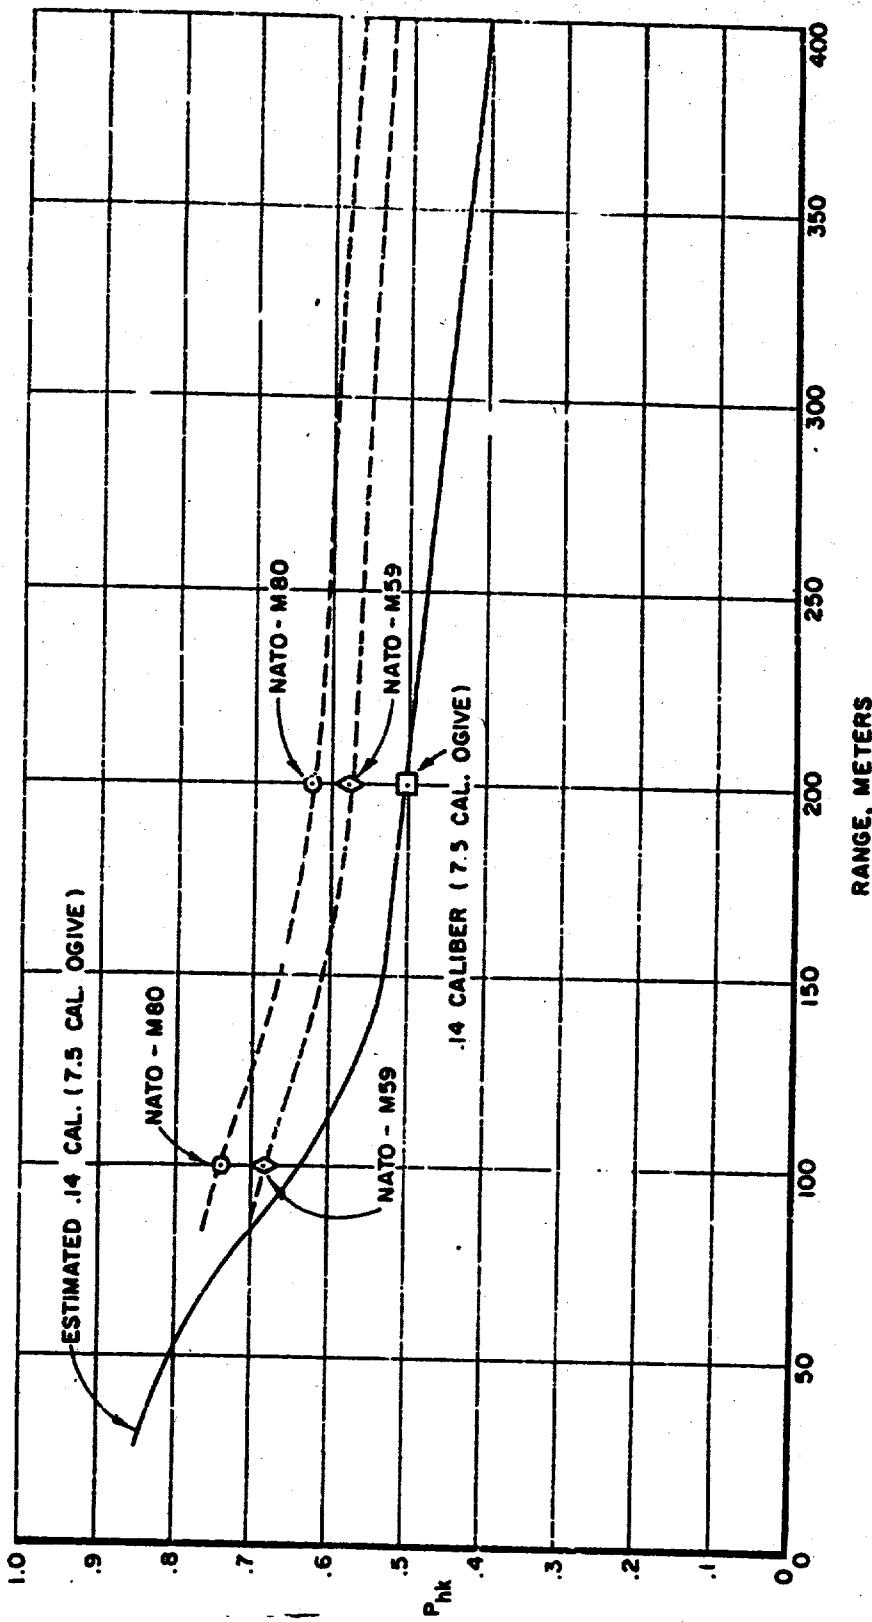

SECRET

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
10	Commander Armed Services Technical Information Agency ATTN: TIPCR Arlington Hall Station Arlington 12, Virginia	1	Commanding Officer U.S. Army Chemical Research & Development Laboratories ATTN: Dr. Dziemian Army Chemical Center, Maryland
1	Director of Defense Research and Engineering (OSD) ATTN: Director/Ordnance Washington 25, D.C.	1	Commanding General U.S. Continental Army Command Fort Monroe, Virginia
1	Chief of Ordnance ATTN: ORDTB - Bal Sec Department of the Army Washington 25, D.C.	1	President U.S. Army Infantry Board Fort Benning, Georgia
1	Commanding General Frankford Arsenal ATTN: Mr. John Ragan Philadelphia 37, Pennsylvania	1	Commandant The Infantry School Fort Benning, Georgia
3	Commanding Officer Picatinny Arsenal ATTN: Feltman Research and Engineering Laboratories Dover, New Jersey	1	Commandant Army War College ATTN: Library - F229 Carlisle Barracks, Pennsylvania
1	Commanding Officer Diamond Ordnance Fuze Laboratories ATTN: Technical Information Office - Branch 012 Washington 25, D.C.	1	Chief of Staff, U.S. Army Research and Development ATTN: Colonel J.B. Hartgering Room 3D422 Washington 25, D.C.
2	Commanding Officer Springfield Armory ATTN: Mr. F. Chakour Mr. E. Harvey Springfield 1, Massachusetts	3	Chief, Bureau of Naval Weapons ATTN: DIS-33 Department of the Navy Washington 25, D.C.
1	Commanding General Ordnance Weapons Command ATTN: Mr. Gordon Gnam Rock Island, Illinois	1	Commander U.S. Naval Ordnance Test Station ATTN: Mr. R.T. Gray - Code 121 China Lake, California
		1	Director Marine Corps Landing Force Development Center Marine Corps School Quantico, Virginia

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>
10	The Scientific Information Officer Defence Research Staff British Embassy 3100 Massachusetts Avenue, N.W. Washington 8, D.C.
4	Defence Research Member Canadian Joint Staff 2450 Massachusetts Avenue, N.W. Washington 8, D.C.

<p>AD Ballistic Research Laboratories, ARI ESTIMATED INCAPACITATION PROBABILITIES OF CALIBER .14 BULLETS (U) Chester Garbarek, Anthony Ricchiazzi, and Dennis Dunn BRIL Memorandum Report No. 1409 June 1962</p> <p>DA Project No. 503-04-010, OMSC No. 5010.11.817 SECRET Report</p> <p>Caliber .14 spin-stabilized projectiles were fired into gelatin and measurements of the loss in velocity of the projectiles were obtained. The yaw angle at impact and the striking velocity were varied and were related to the energy absorbed by the gelatin. The probability of incapacitation as a function of range was computed. The effect of two different nose shapes on the probability of incapacitation was studied.</p>	<p>UNCLASSIFIED</p> <p>AD Ballistic Research Laboratories, APG ESTIMATED INCAPACITATION PROBABILITIES OF CALIBER .14 BULLETS (U) Chester Garbarek, Anthony Ricchiazzi, and Dennis Dunn Wound ballistics - Small arms</p> <p>DA Project No. 503-04-010, OMSC No. 5010.11.817 SECRET Report</p> <p>Caliber .14 spin-stabilized projectiles were fired into gelatin and measurements of the loss in velocity of the projectiles were obtained. The yaw angle at impact and the striking velocity were varied and were related to the energy absorbed by the gelatin. The probability of incapacitation as a function of range was computed. The effect of two different nose shapes on the probability of incapacitation was studied.</p>	<p>UNCLASSIFIED</p> <p>AD Ballistic Research Laboratories, APG ESTIMATED INCAPACITATION PROBABILITIES OF CALIBER .14 BULLETS (U) Chester Garbarek, Anthony Ricchiazzi, Dennis Dunn Small arms ammunition - Terminal ballistics Wound ballistics - Small arms</p> <p>DA Project No. 503-04-010, OMSC No. 5010.11.817 SECRET Report</p> <p>Caliber .14 spin-stabilized projectiles were fired into gelatin and measurements of the loss in velocity of the projectiles were obtained. The yaw angle at impact and the striking velocity were varied and were related to the energy absorbed by the gelatin. The probability of incapacitation as a function of range was computed. The effect of two different nose shapes on the probability of incapacitation was studied.</p>
--	--	--



DEPARTMENT OF THE ARMY
US ARMY RESEARCH, DEVELOPMENT AND ENGINEERING COMMAND
ARMY RESEARCH LABORATORY
ABERDEEN PROVING GROUND MD 21005-5066

AMSRD-ARL-O-IO-SC (APG) (380)

14 October 2005

MEMORANDUM FOR SEE DISTRIBUTION

SUBJECT: Distribution Statement - Ballistic Research Laboratories Memorandum Report No. 1409

1. Reference: Ballistic Research Laboratories Memorandum Report No. 1409, "Estimated Incapacitation Probabilities of Caliber .14 Bullets" by Chester Grabarek, Anthony Ricchiazzi, and Dennis Dunn, June 1962, UNCLASSIFIED, AD no. 331651.
2. Subject matter experts and the Army Research Laboratory Security/CI Office have determined that the subject report may be released to the public. Request that you mark all of your copies of the document with the following distribution statement:

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

3. Please direct your questions to Mr. Douglas J. Kingsley, telephone 410-278-6960.

Constance L. Berry
CONSTANCE L. BERRY
Team Leader
Security/CI Office